


# 3 WAY SOLENOID

## Characteristics

- 3 way solenoid
- Manual opening

## Specifications

• Function	3 way NO / NC
• Ports size	1/8" BSP / NPT
• Orifices available	1, 1,2, 1,6 mm
• Max. pressures	see table
• Temperatures	
Fluid	5° C - 50° C
Ambient	-10° C - 50° C
• Standard protection class	IP66
• Voltages	see table

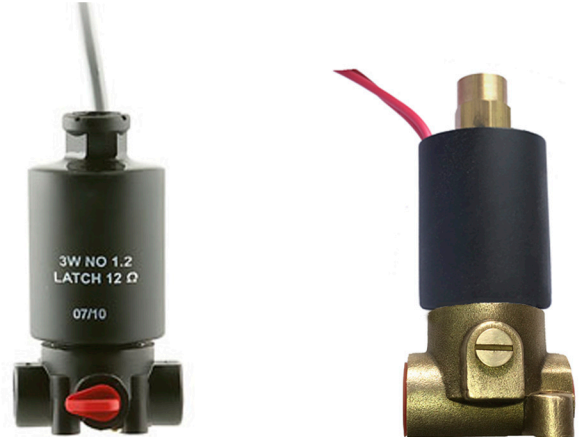

## Max. Pressure (bar)

Function	Orifice	AC	DC	Latch
3 way NC	1.0	16	12	16
	1.2	11	9	11
	1.6	6	5	6
3 way NO	1.0	16	16	16
	1.2	12	12	12
	1.6	8	8	8

## Materials

• Manual opening	Reinforced Nylon
• Body	Brass
	Reinforced Nylon
• Solenoid operator	AISI 300 / 400
• Seals	EPDM
• Spring	AISI 300

## Voltage and current

Solenoid	Voltage	Amps	
		Inrush	Holding
3 V 50/60 Hz	24, 110	0,125	0,125
3 V DC	12, 24	4,5 W	

